

CLUB DUO



DESCRIPTION

Seat and backrest

- soft upholstered seat and backrest
- upholstered seat and backrest with integrated armrests

FINISHES

CONTRACT



Composition: 100% polyester

Weight: 320 g/m²

Abrasion Resistance: 100 000 Martindale cycles

Flammability: EN 1021-1, EN 1021-2, BS 7176 low hazard, BS 7176 medium hazard, BS 5852 Crib 5, NF P 503 M1,

DIN 4102 B1, UNI 9174 Classe 1

Other: Recycled EU Flower Certified

LEATHER IMITATION V



Composition: 100% polyester PVC coated


Weight: 460 g/m²

Abrasion Resistance: >=30 000 Martindale cycles

Flammability: the selected colours (marked as N) are fire resistant according to EN 1021-1, EN 1021-2, BS 5852-1

Other: easy to keep clean

OBAN

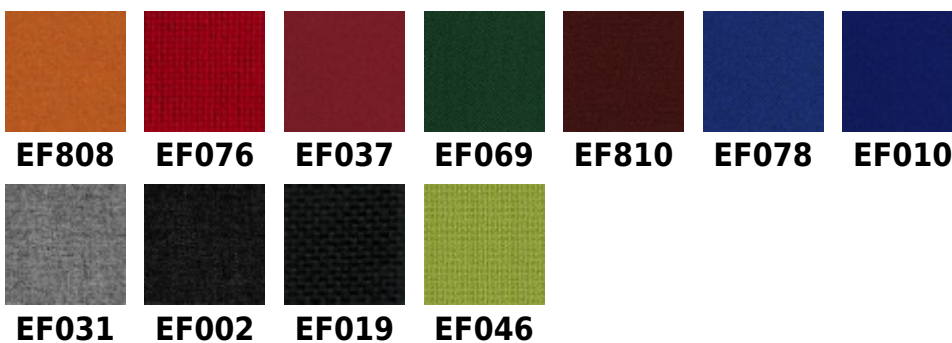

Composition: 100% polypropylene

Weight: 230 g/m²

Abrasion Resistance: grade A tested in accordance with EN 14465:2003

Flammability: EN 1021-1

Other: hygienic certificate by National Hygiene Institute in Poland

KAIMAN



Composition: upper layer: 100% polyurethane
bottom layer: 70% polyester, 30% cotton

Weight: 435 g/m²

Abrasion Resistance: 100 000 Martindale cycles

Flammability: BS 5885 Source 0

Other: Hydrolisis (DIN EN ISO 32100 (DIN 53351) / DIN 53359) - 15 000 revs

SEMPRE



Composition: 100% polyester

Weight: 366 g/m²

Abrasion Resistance: 160 000 Martindale cycles

Flammability: EN 1021-1, EN 1021-2

Other: hygienic certificate by National Hygiene Institute in Poland

VALENCIA



Composition: upper layer: 100% vinyl, bottom layer: 100% polyester Hi-Loft

Weight: 650 g/m²

Abrasion Resistance: 300 000 Martindale cycles

Flammability: EN 1021-1, EN 1021-2, DIN 4102 B2, NF P 92-503 M2, Önorm B 3825, Önorm A 3800-1 Q1

Other: EN 71-3 Safety of toys (migration of certain elements)

PERMABLOK3® - superior antibacterial, antistain and antifungal protection

XTREME



Composition: 100% polyester FR

Weight: 310 g/m²

Abrasion Resistance: 100 000 Martindale cycles

Flammability: EN 1021-1, EN 1021-2, BS 7176 low hazard, BS 7176 medium hazard, BS 5852 Crib 5, DIN 4102 B1, UNI 9174 Classe 1

SILVERTEX



Composition: upper layer: 100% vinyl, bottom layer: 100% polyester Hi-Loft

Weight: 685 g/m²

Abrasion Resistance: 300 000 Martindale cycles


Flammability: EN 1021-1, EN 1021-2, DIN 4102 B1, NF P 92-503 M2, Önorm B 3825, Önorm A 3800-1 Q1

Other:

PERMABLOK3® - superior antibacterial, antistain and antifungal protection

SILVERGUARD® - natural environmentally friendly bacteria fighting defense to inhibit odour and stain causing bacteria (silver ion technology)

FINE LEATHER SD

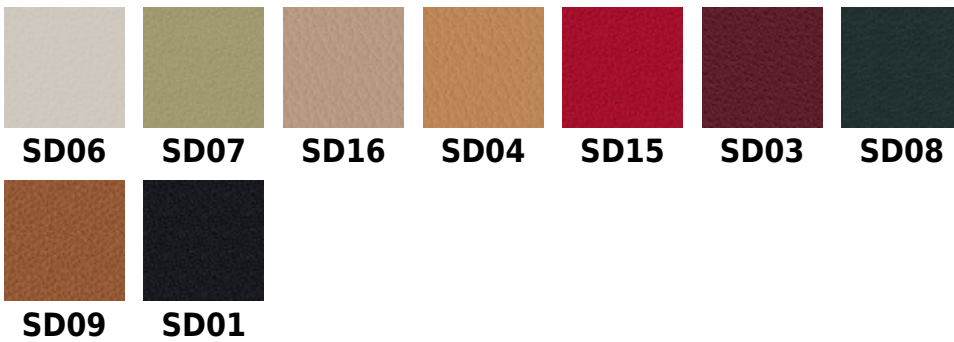

Composition: soft grain leather (0.9 - 1.1 mm), thoroughly dyed (completely dyed)

FINE LEATHER LE



Composition: soft grain leather (0,9 - 1,1 mm), thoroughly dyed (completely dyed)

FINE LEATHER LE FRONT



Composition: soft grain leather (0,9 - 1,1 mm), thoroughly dyed (completely dyed)

FINE LEATHER SD FRONT

Composition: soft grain leather (0.9 - 1.1 mm), thoroughly dyed (completely dyed)

ERA




Composition: 100% polyester

Weight: 320 g/m²

Abrasion Resistance: ≥100 000 Martindale cycles

Flammability: EN 1021-1, EN 1021-2, BS 7176 LOW hazard

[DIMENSIONS](#)

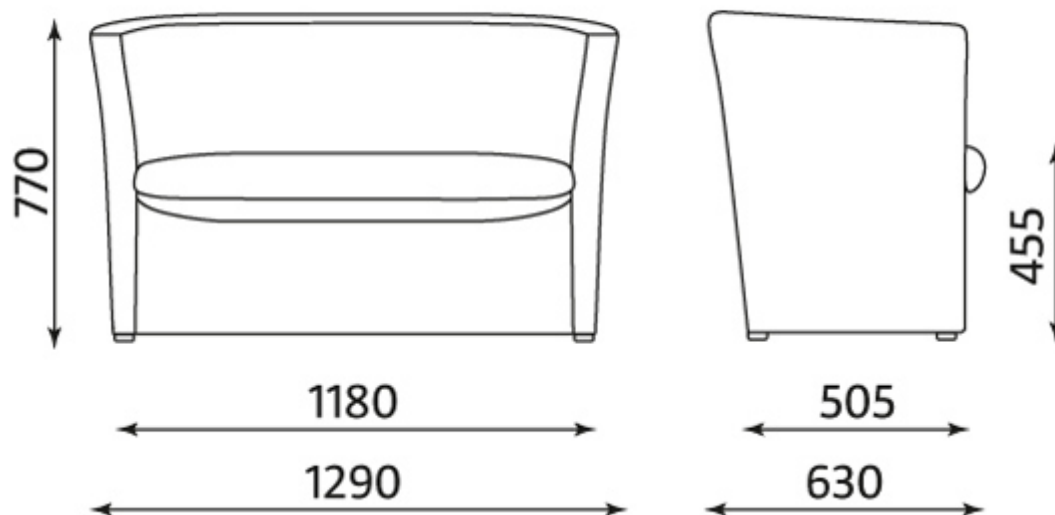

All rights reserved 2013 Nowy Styl Group

CONTACT

Nowy Styl Sp. z o.o.
Pużaka 49
38-400 Krosno
Tel. +48 13 43 76 100
Fax +48 13 43 62 732
info@nowystylgroup.com

Export Department

Mięsowicza 6
38-400 Krosno
Poland
Tel. +48 13 43 76 111
export@nowystylgroup.com

Marketing Department

Warszawska 15
32-086 Węgrzce
Poland
Tel. +48 12 63 98 602